

Item No: PQX064A

Product Feature: :



- 1.2835 SMD LED as light source,super luminous flux,large viewing angle,even lighting,low attenuation.
- 2.Best cost performance,high color consence.
- 3.Energy saving,environment-friendly,long life span 50,000hrs.

Electrical Parameter


Item No:	Angle (°)	Color	Luminous (lm)	Wavelength Scope (nm/K)	Working Voltage(V)	Power(W)	Life Span(h)
PQR064A	≥120	Red	1750lm	620-630nm	DC12V	48W	50,000
PQG064A	≥120	Green	3000lm	520-530nm	DC12V	48W	50,000
PQB064A	≥120	Blue	950lm	465-475nm	DC12V	48W	50,000
PQY064A	≥120	Yellow	1750lm	588-595nm	DC12V	48W	50,000
PQW064A	≥120	White	5400lm	6000-7000K	DC12V	48W	50,000
PQN064A	≥120	Natural White	5400lm	4000-4500K	DC12V	48W	50,000
PQM064A	≥120	warm white	5400lm	2700-3000K	DC12V	48W	50,000
PQC064A	≥120	Cool white	5400lm	9000-12000K	DC12V	48W	50,000
PQN064A	≥120	natural white	5400lm	4000-4500k	DC12V	48W	50,000
PQO064A	≥120	orange	1750lm	604-613nm	DC12V	48W	50,000

others


LED No.	Cascade QTY	IP degree	FPC width/color	Driving Type	Fasten Type	Fasten Type	Store temp.
600pcs	5m	IP66	8mm/white	constant voltage	20mm,3M double-sided adhesive	-40°C — +50°C	-40°C — +60°C


Wires length150mm,20AWG line Red&Black wires, Red=positive wire, Black=negative wire

Dimension (mm) :

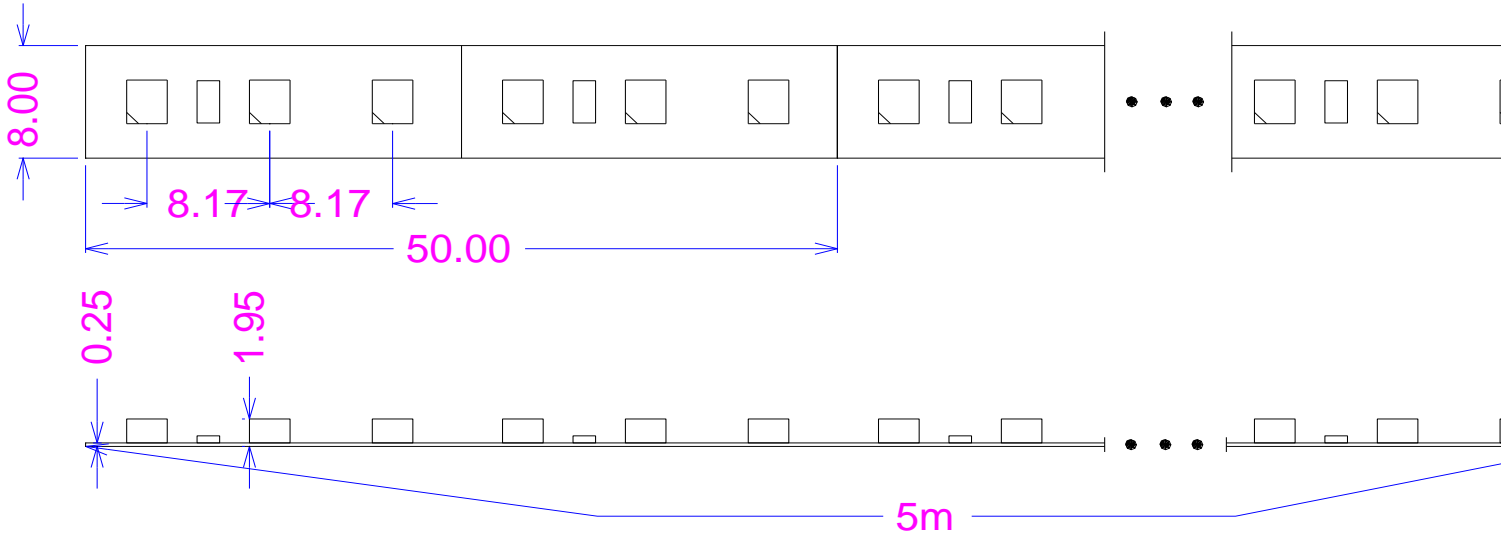

Connection Diagram (mm) :

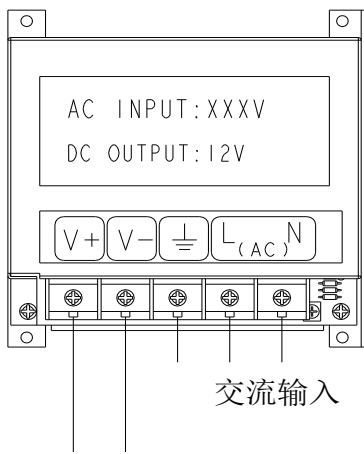


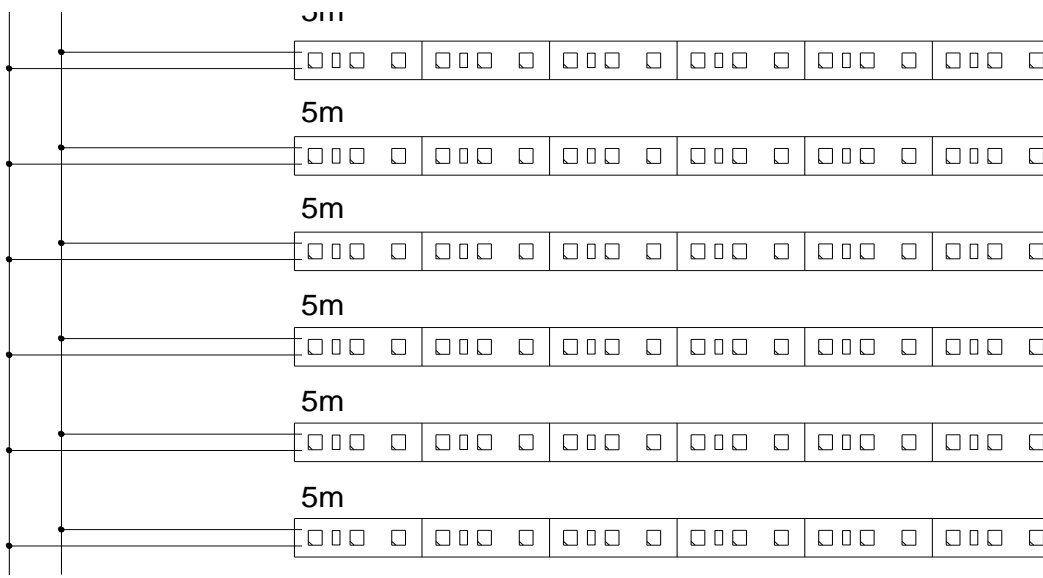

Notes:



- 1、 The thickness of the wires shall be adopted based on the possible current,products power, length of the wire
- 2、 The both ends of extention shall be dealt with as waterproof;
- 3、 Don't work under the situations of touching in static-electronics environments or light on
- 4、 The strip can be connected to 5m at maximum and no exceed;
- 5、 Suggest choosing high-qualified switch power(have shortelectronics ,overvoltage and overloading protection
- 6、 Acid silicone glue is forbidden!

国际:
 5m/袋, 0.115Kg/袋, 20袋/小箱, 2.6Kg小箱
 40袋/大箱, 200m/大箱, 5.7Kg/大箱

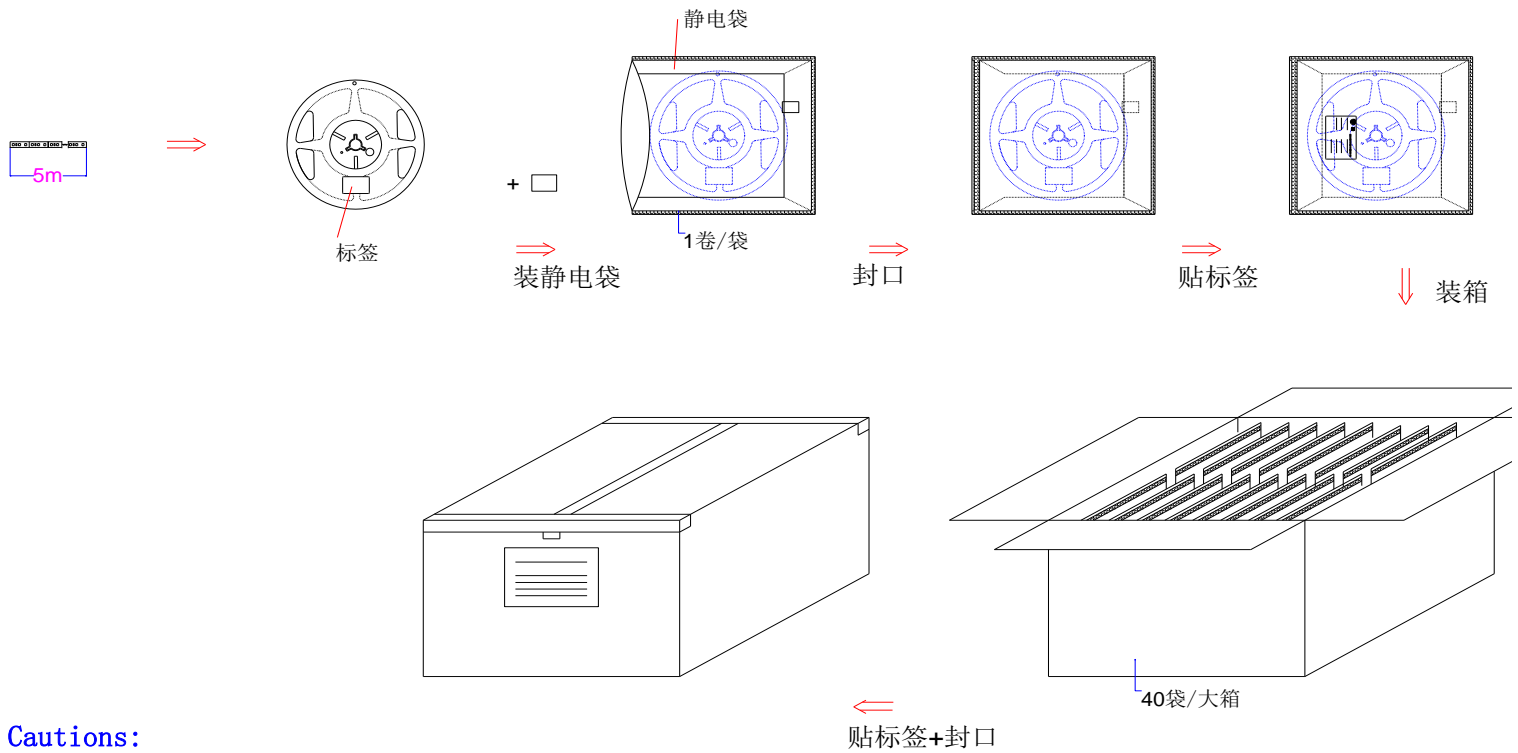

Cautions:

- 1.Outal carton:45x25x25.6cm ; Aluminium-Foil bag:220x240x0.12mm .
- 2.600pcs LEDs per/5m,5m per reel,one reel in one aluminum -foil bag .
- 4.One bigger carton contains two small cartons . (300m in one outal carton)
- 5.N.W: 3.9± 10%Kg/bigger carton
- 6.G.W: 5.7± 15%Kg/bigger carton



3

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000

PQC064A

≥ 120

Cool white

5400lm

9000-12000K

DC12V

48W

50,000