

Item No: 335 side view strip

Product Feature: :




- 1.335SMD LED as light source,super luminous flux,large viewing angle,even lighting,low attenuation.
- 2.Best cost performance,high color consence.
- 3.Energy saving,environment-friendly,long life span 50,000hrs.
- 4.Parylene waterproof IP65


Electrical Parameter							
Item No:	Angle (°)	Color	Luminous (lm)	Wavelength Scope (nm/K)	Working Voltage(V)	Power(W)	Life Span(h)
PDW067A	≥120	White	360lm/m	6500K	DC12V	4.8W/M	50,000
others							
LED No.	Cascade QTY	IP degree	FPC width/color	Driving Type	Fasten Type	Fasten Type	Store temp.
300pcs	5m	IP65	5mm/white	constant voltage	3M double-sided adhesive	-40℃ —— +50℃	-40℃ —— +60℃
Wires	length150mm,20AWG line Red&Black wires, Red=positive wire, Black=negative wire						

Electrical Parameter							
Item No:	Angle (°)	Color	Luminous (lm)	Wavelength Scope (nm/K)	Working Voltage(V)	Power(W)	Life Span(h)
PDW097A	≥120	White	580lm/m	6500K	DC12V	6W/M	50,000
others							
LED No.	Cascade QTY	IP degree	FPC width/color	Driving Type	Fasten Type	Fasten Type	Store temp.
480pcs	5m	IP65	5mm/white	constant voltage	3M double-sided adhesive	-40℃ —— +50℃	-40℃ —— +60℃
Wires	length150mm,20AWG line Red&Black wires, Red=positive wire, Black=negative wire						

Electrical Parameter							
Item No:	Angle (°)	Color	Luminous (lm)	Wavelength Scope (nm/K)	Working Voltage(V)	Power(W)	Life Span(h)
PDW064A	≥120	White	720lm/m	6500K	DC12V	9.6W/m	50,000
others							
LED No.	Cascade QTY	IP degree	FPC width/color	Driving Type	Fasten Type	Fasten Type	Store temp.
600pcs	5m	IP65	8mm/white	constant voltage	3M double-sided adhesive	-40℃ —— +50℃	-40℃ —— +60℃
Wires	length150mm,20AWG line Red&Black wires, Red=positive wire, Black=negative wire						

Connection Diagram (mm) :

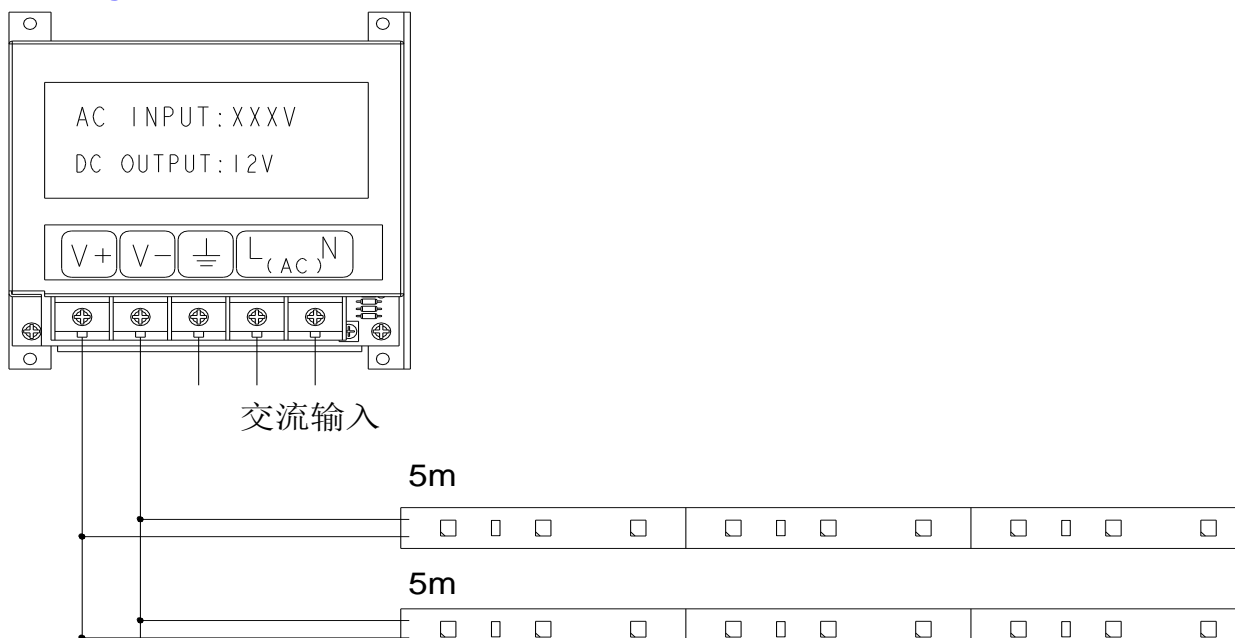

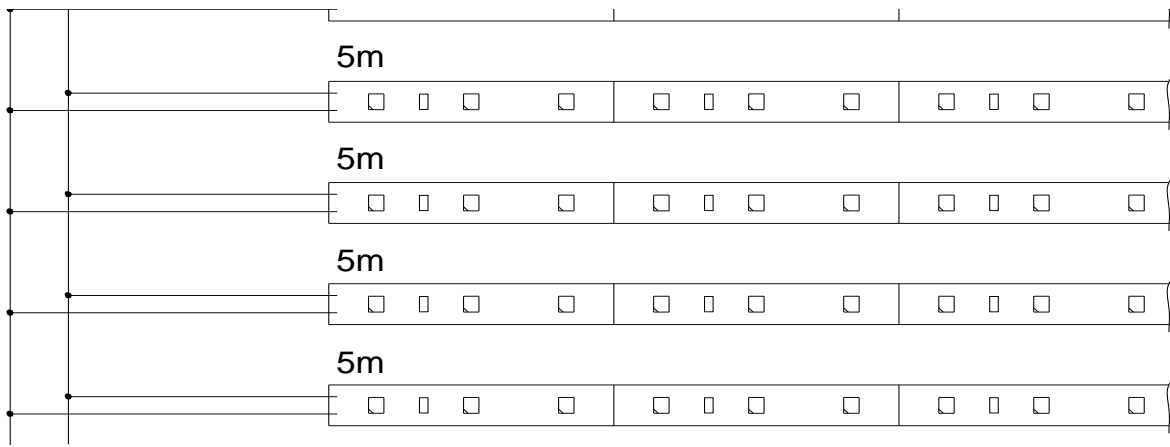

Notes:

- 1、 The thickness of the wires shall be adopted based on the possible current,products power, length of the wire
- 2、 The both ends of extention shall be dealt with as waterproof;
- 3、 Don't work under the situations of touching in static-electronics environments or light on
- 4、 The strip can be connected to 5m at maximum and no exceed;
- 5、 Suggest choosing high-qualited switch power(have shortelectronics ,overvoltage and overloading protection
- 6、 Acid silicone glue is forbidden!

Cautions:

- 1.Outal carton:45x25x25.6cm
- 2.150pcs LEDs per/5m,5m per reel,one reel in one aluminum -foil bag .
- 3.One outal carton contains two small cartons . (300m in one outal carton)
- 4.N.W: $5.1 \pm 10\%$ Kg/outal carton
- 5.G.W: $5.9 \pm 15\%$ Kg/outal carton